

LOUVIGNY Fencing - 3 rails on C100 steel post Ref: CV 300

DESCRIPTION

- 1 - square planed rails (150 x 50) in 3.00 m,
- 2 - C100 steel post in 2.00m with a wooden spacer,
Ø 18 cm, length 1.30 m,

3.00 m post-spacing

Above ground height of the rail: 1.20 m

Above ground height of the post: 1.30 m

Weight per 1m: 32.5 kg

OPTIONS:

Fencing 2 rails in 1.10 m

Fencing 1 rail in 0.75 m


ACCESSORY:

C100 wooden cover

PACKING

3.00 m length

Maximum weight of the package: 520 Kg

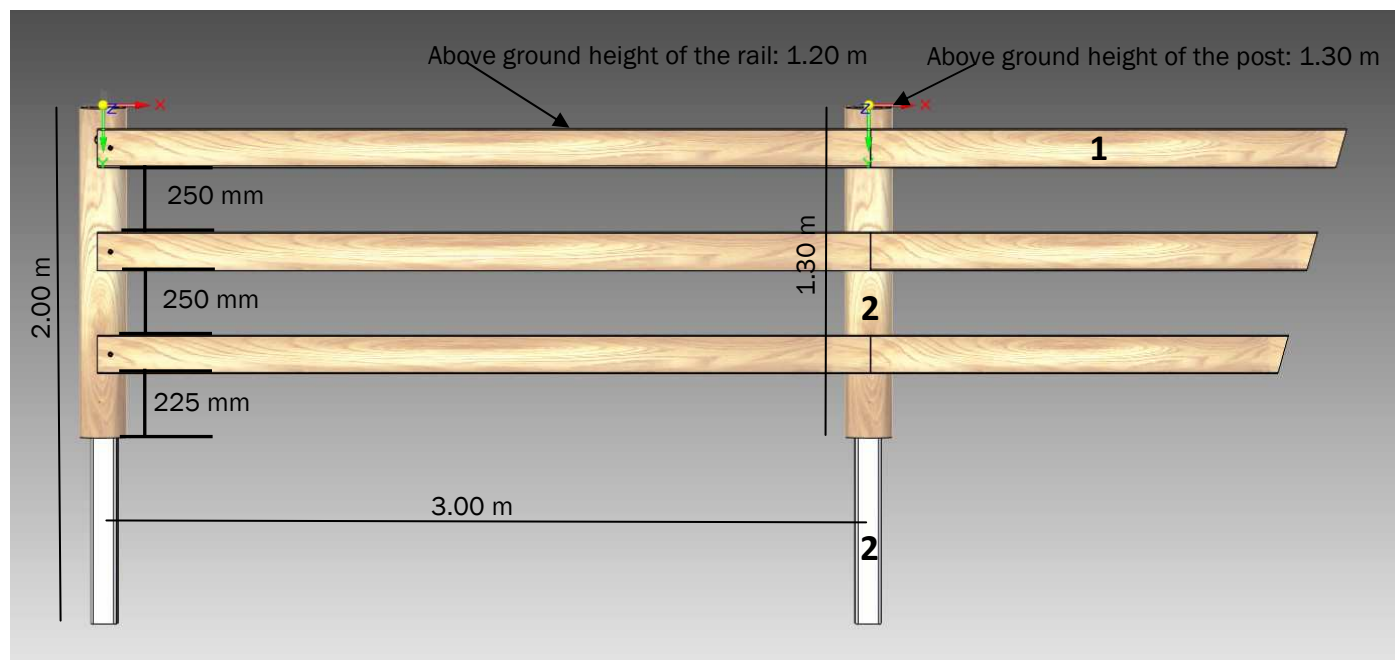

Wood specie: **DOUGLAS fir**, pressure treated wood with chromium and arsenic free preservatives according to **standard EN 335. 10-year guarantee** against fungus and cryptogam attacks. **PEFC certificated** wood.

October 2013



61160 Villedieu-lès-Bailleul

Tel. : +33 2 36 11 02 – Fax : +33 2 33 39 28 75

www.tertu.com

tertu.
EQUIPEMENTS
roads and sites worldwide

INSTALLATION

- 1 - Drive the **C100** into the ground (3.00 m post spacing) to reach 1.30 m height above ground.
- 2 - Place the **wooden spacer** onto the C100 steel post and fix it ahead with the **TRCC 16-140** bolt and back with a **self-drilling screw 5x50**.
- 3 - Place **the rails** on the wooden spacer and fix them with **stainless steel screws 6-100**. The upper rail is placed at 0.10 m from the top of the post. Rails spacing has to reach 250 mm. The lower rail has to be placed at 225 mm from the ground.

